


Kan reduceras genom att böja ner rören och filtret, till ca. 45°.

Can be reduced by bending the tubes and filter-dryer aside to abt. 45°.

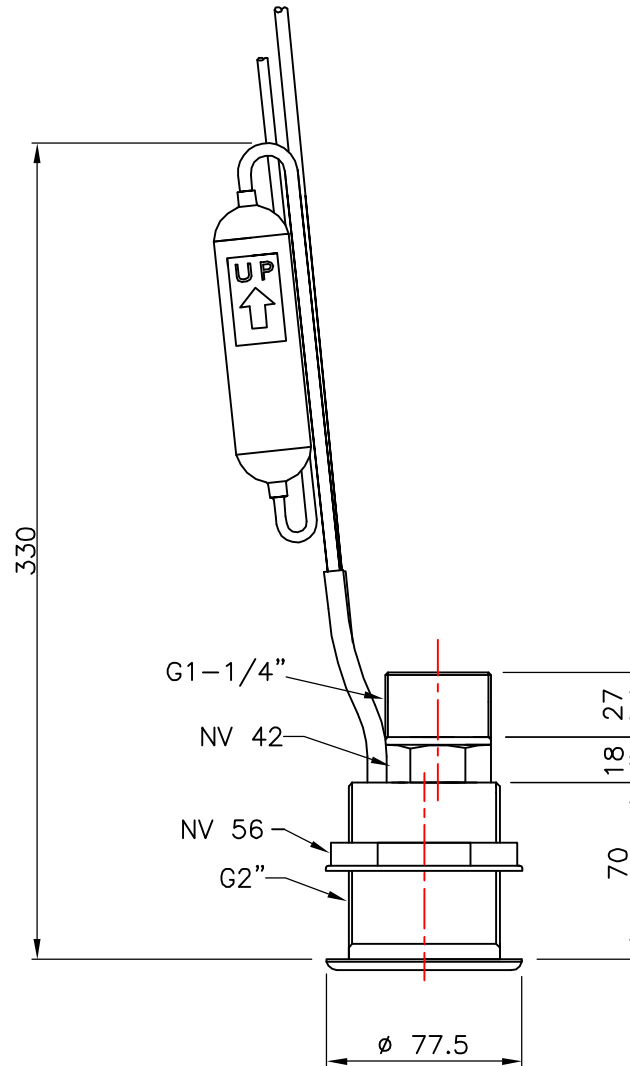

Isotherm SP through hull fitting

Itemref	Quantity	Title/Name, designation, material, dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	Filename	Date	Scale	
				970727/LLG		
Owner				Title/Name		
Thermoprodukter AB Kalmar				SP bordgenomföring		
				Drawing number	Edition	Sheet
				000397	2	

RevNo	Revision note	Date	Signature	Checked